



高清网络摄像机快速使用指南

HD Network Camera Quick Reference



中文

繁體



English

目录

Contents

适用型号/適用型號/ Models.....	1
后面板介绍及连线.....	2
Interface and connector	2
拆箱.....	5
安全说明.....	6
配置及使用	8
配置静态IP地址.....	8
登录客户.....	9
拆箱.....	13
安全说明.....	14
配置及使用.....	16
配置静态IP地址.....	17
登录客户端.....	18
Unpacking.....	21
Safety Rules.....	22
Network Configuration.....	24
Using the IPC.. ..	25




适用型号/ 適用型號/ Models

产品外观	产品名称	产品型号
	高清枪式网络摄像机 高清槍式網路攝像機 HD Box Network Camera	IPC110
	高清室内吸顶防暴网络半球 高清室內吸頂防暴網路半球 HD Ceiling Vandal-proof Half-dome Network Camera	IPC212


后面板介绍和连线 后面板介紹和連線 Interface and Connector

IPC110

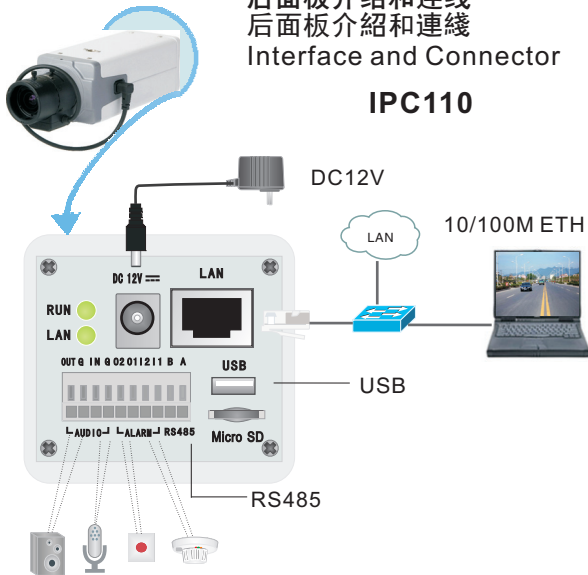

后面板介绍和连线
后面板介紹和連線
Interface and Connector

IPC212

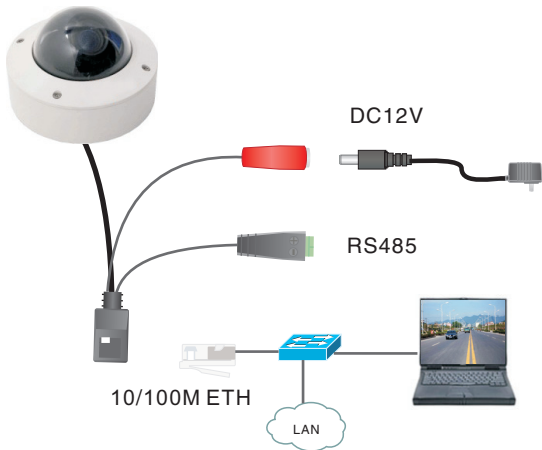

MEMO



高清网络摄像机快速使用指南

前言

感谢您购买我司产品，如对本公司产品有疑问或需要，请随时和我们联系。

我们尽最大努力来保证本手册信息的正确性，如因升级等原因发生信息修改，恕不另行通知。获取最新文档请联系产品供应商。

拆箱

包装中包含的主要产品如下：

1. 高清摄像机
2. 硬件安装套件
3. 软件光盘
 - 用户指南
 - 快速安装指南
 - 软件安装包

安全说明

此内容的目的是确保用户正确使用本产品，以避免危险或财产损失。在使用此产品之前，请认真阅读此手册并妥善保管以备日后参考。

1. 请使用满足安全电压要求的电源。
2. 如果设备工作不正常，请联系购买设备的商店或最近的服务中心。
不要以任何方式随意拆卸或修改设备。
3. 请勿将此产品摔落地下或受强烈敲击。
4. 在对摄像机进行清洁时，请使用吹气球除去镜头或滤光片上的尘埃。使用柔软、干燥的布清洁摄像机的外表面。对于镜头上顽固的污迹，可使用专业镜头纸擦拭。请勿使用挥发性溶剂，如酒精、苯、稀释剂等，以免损坏表面涂层。
5. 避免将摄像头对准强光(如灯光照明、太阳光等处)聚焦，否则容易引起过亮或漏光现象(这并非摄像机故障)也将影响摄像头寿命。
6. 激光束可能烧毁摄像头，在激光装置被使用的情况下，请一定不要让摄像头的表面暴露于激光束之下。

7. 避免将被产品暴露在非用户手册✦所示的工作环境下使用。
8. 使用时不可让水及任何液体流入摄像机。
9. 当运送摄像机时，请重新以出厂时的包装进行包装，或用同等品质的材质包装。
10. 需要替换部件时，请事先与经销商联系，更换指定的部件，或与原部件具有相同特性的部件。擅自使用其它部件进行替换，后果自负。

用户在使用设备时，请遵守以上安全说明。如果用户因没有按照以上安全说明，致使设备不能正常使用或损坏设备等情况，责任由用户承担。

✦ 详见附带光盘中的《高清网络摄像机用户手册》

配置及使用

设备出厂时IP地址为0.0.0.0，第一次使用时请与PC接入同一交换机，使用IPCSearch分配IP地址。

若IPC设备所接入的网络有DHCP服务，DHCP服务器将自动给IPC分配IP地址。可使用IPCSearch修改网络参数，区分多台IPC。


光盘中附带 **IPCSearch** 配置工具。

配置IP地址

运行IPCSearch，搜索并选中需要配置的设备，点击按

修改网络参数

钮界面如图：

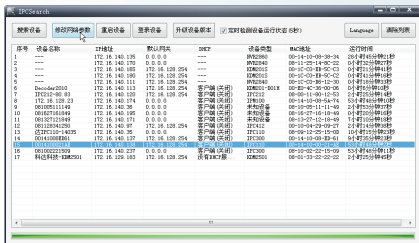

静态分配IP地址时，选择自定义地址，填写以太网参数。

注意：请确保IPC设备与PC在同一网段中。




登录客户端

完成IP配置后，可直接在IPCSearch中点击 **登录设备** 登录web客户端。如果已配置过IP，可以直接在IE地址栏中输入设备的IP地址，连接web客户端。

运行web客户端前，请安装页面中的Active控件,如图。

如果安装控件不成功，请进行如下操作：

1. 点击IE工具栏**Internet 选项-安全页签**。



2. 点击页签上的“可信站点-站点”按钮，输入该IPC设备地址，并添加，如图。

注意：在添加地址时，请去掉“对该区域中的所有站点要求服务区验证”选项。



设置完成后，请在IE地址栏中重新输入设备的IP地址，并按提示安装控件，登陆IPC Ctrl web客户端。

登录界面如右图，默认用户名与密码均为admin。

关于IPC的详细配置方 请参见设备的用户手册。



进入客户端后，可以直接浏览图像，菜单界面如下：
上方：菜单区域，左方：云台控制和摄像机调节区域。



MEMO



高清網絡攝像機快速使用指南

言

感謝您購買我司產品，如對本公司產品有疑問或需要，請隨時和我們聯系。

本手冊的內容將根據產品功能的升級而更新，更新的內容將會在新版本手冊中加入，恕不另行通知。

拆箱

包裝中包含的主要產品如下：

1. 高清攝像機
2. 硬件安裝套件
3. 軟件光盤
 - 用戶指南
 - 快速安裝指南
 - 軟件安裝包

安全說明

此內容的目的是確保用戶正確使用本產品，以避免危險或財產損失。在使用此產品之前，請認真閱讀此手冊并妥善保存以備日后參考。

1. 請使用滿足安全電壓要求的電源。
2. 如果設備工作不正常，請聯系購買設備的商店或最近的服務中心，不要以任何方式隨意拆卸或修改設備。
3. 請勿將此產品摔落地下或受強烈敲擊。
4. 在對攝相機進行清潔時，請使用吹氣球除去鏡頭或濾光片上的塵埃；使用柔軟、干燥的布清潔攝像機的外表面。對於頑固的污迹，可使用專用鏡頭紙擦拭。請勿使用揮發性溶劑，如酒精、苯、稀釋劑等，以免損壞表面塗層。
5. 避免將攝像頭對準強光（如燈光照明、太陽光等處）聚焦，否則容易引起過亮或漏光現象（這并非攝像機故障），也將影響攝像頭壽命。


6. 激光束可能燒毀攝像頭，在激光裝置被使用的情況下請您一定不要讓攝像頭的表面暴露于激光束之下。
7. 避免將本產品暴露在非用戶手冊✦所示的工作環境下。
8. 使用時不可讓水及任何液體流入攝像機。
9. 當運送攝像機時，重新以出廠時的包裝進行包裝，或用同等品質的材質包裝。
10. 需要替換部件時，請事先與購買商店或最近的服務中心聯系，更換指定的替換部件，或與原部件具有相同特性的部件。

用戶在使用設備時，請遵守以上安全說明。如果用戶因沒有按照以上安全說明，致使設備不能正常使用或損壞設備等情況，責任由用戶承擔。

✦ 詳見附帶光盤中的《高清網絡攝像機用戶手》

靜態分配IP地址時，選擇自定義地址，填寫以太網參數。

注意：請確保IPC設備與PC在同一網段中。



登錄客戶端

完成IP配置后，可直接在IPCSearch中點擊


登錄設備

登錄web客戶端。如果已配置過IP，可以直接在IE地址欄中輸入設備的IP地址，連接web客戶端。

請安裝頁面中的Active控件,如圖。


如果安裝控件不成功，請進行如下操作：

1. 打開Internet Explore，
工具-網際網路選項-安
全性



2. 點擊頁簽上的信任的網站-站點按鈕，輸入該IPC設備地址，并新增，如圖。

注意：在添加地址時，請去掉此區域內的所有網站需要伺服器驗證選項。



設置完成后，請在IE地址欄中重新輸入設備的IP地址，并按提示安裝控件，登陸IPCCtrl web客戶端。

登錄界面如右圖，默認用戶名與密碼均為admin。

關於IPC的詳細配置方法請參見設備的用戶手冊



進入客戶端后，可以直接瀏覽圖像，菜單界面如下：
上方：菜單區域，左方：雲臺控制和攝像機調節區域。



MEMO



HD Network Camera Quick Reference

Preface

Thank you for purchasing our products, if you have any questions , please do not hesitate to contact us any time.

We try our best to insure the correctness, and our document will update with the software without announcement, please ask for your provider to access the document up to date.

Unpacking

Main components included in the packing box,

- a. HD Network Camera
- b. the hardware Installation suit
- c. Software CD
 - User Manual
 - Quick Reference
 - IPCSearch

Safety Rules

The purpose of this content is to ensure that users use the product correctly to avoid danger or damage to property.

Before using this product, please read this manual carefully and keep it for future reference.

1. Please use the power supply voltage satisfying the safety requirements.
2. If the device is not working properly, please contact the nearest service center. Do not in any way disassemble or modify the device (unauthorized modification or repair the problems caused, at your own risk).
3. The device do not fall to the ground or by the strong hit.
4. Cleaning the camera, please use the blower to remove dust on the lens or filter; Use a soft, dry cloth to clean the outer surface of the camera. For stubborn stains, use a little detergent dip a soft cloth to wipe, then dry.
Do not use volatile solvents such as alcohol, benzene, Thinner, etc., so as not to damage the surface coating.
5. To avoid targeting light (such as lighting, sunlight,

Etc) focus, otherwise easily lead to too bright or pulllight phenomena (this is not a camera malfunction), will also affect the CCD life.

6. Laser beams can destroy CCD by burning. Laser System used in the case, you must not make CCD's surface under laser beam Exposure.
7. To avoid the products will be shown in exposure of non-work environment (such as the free will of this product in a non-working environment caused by maintenance problems and costs, at your own risk) over this user manual.
8. Please be sure do not let the water and any liquid flow into the camera.
9. When transporting the camera, please re-pack the camera in the factory packaging, or using the same quality packaging material.
10. When need replace any parts of the camera, please contact in advance with the nearest service center to replace the specified replacement parts, or parts have the same characteristics of the original components. Unauthorized use of other replacement parts at your peril.


Network configuration

Step 1

Make sure your PC and the IPC device are in the same LAN. Otherwise, the IPC device may not be detected.

Step 2

Run IPCSearch from the installation CD on your PC and select the device by click its name inside the list and configure the IP address by click **Modify Params** the figure as following.

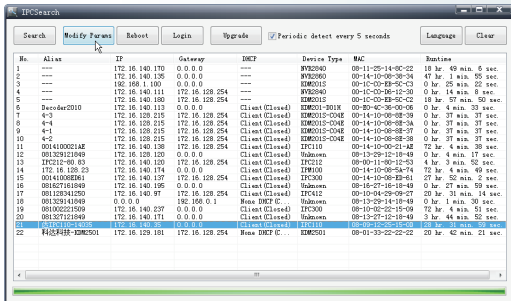

HDCP, select **Auto-obtain device address**.

Static IP select **Custom device address** then enter the specific address.



Using the IPC

Double click the selected device in the list of IPCSearch, and it will switch to the login website.

If the OCX in the IE can't download successfully, do the following,



Step_1

Click **tools-Internet Options-Security-Trusted Sites** as the following figure,



Step 2

Click **Sites in the IE** then add the IPC IP address. Be sure not to select **require server Verification (https:)** for all sites in this zone. Close the interface and re-login.



The default user name and password both are **admin**. Enter into the live video interface, if the video play successfully, then installation is finished.

The login interface is as following, you can configure IPC parameters in there.

Please refer to the IPC user manual for details.



After login the IPCCtrl, user can directly browse the live video. The IPCCtrl provided PTZ control icons area and the image adjustment icons area in the left. Provided the menu in the top.



