

NVR2860E-08A

8 Bay RAID Professional Network Video Recorder



Features

High-performance, High-capacity

- H.265 supported
- 4 x 4K@30fps / 16 x 1080p@30fps video decoding capability
- Up to 64 channels
- Up to 320Mbps incoming bandwidth
- 256Mbps output bandwidth
- 64 user access simultaneously
- Max. 8 HDDs up to 64TB storage
- e-SATA storage supported

Easy to install

- Automatic network organizing
- Built-in DHCP server

High reliability


- Embedded Linux
- RAID 0/1/5/6/10
- Supports Automatic Network Replenishment (ANR)
- Supports Packet Loss Recovery (PLR)
- N+1 Hot Backup

Abundant functions and features

- HDMI/VGA simultaneously output different content
- E-Map, TV-Wall supported
- Bi-directional audio, Broadcasting
- NAT, Socks5
- Alarm management
- Free CMS (NVR Station), supports 128 NVR simultaneously
- CMS supports 6 screens simultaneously (4 x Live viewing, 1 x E-Map, 1 x TV-Wall)

Dimensions

Units:mm

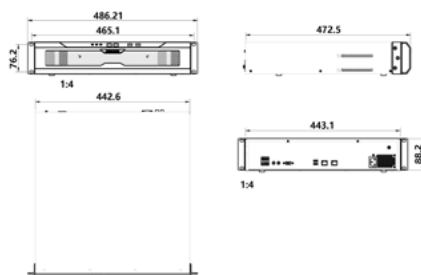

Specifications

	NVR2860E-08016A	NVR2860E-08032A	NVR2860E-08048A	NVR2860E-08064A
Video/Audio Input	16 channel	32 channel	48 channel	64 channel
IP Camera Input	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p	UXGA, 960p, 720p	XGA, SVGA, D1, CIF, QCIF	
Resolution	H.265 / H.264			
Compression	Onvif, RTSP, KEDACOM			
Protocols	64kbps ~ 16384kbps			
Bit rate	160Mbps	320Mbps	320Mbps	320Mbps
Incoming Bandwidth	Live Viewing			
Local Display	1 x HDMI, 1 x VGA, simultaneously output different content			
"Multi Screen Display Local monitor (Main / Secondary):"	1, 3, 4, 9, 15, 16, 1+4, 1+8, 1+9, 1+15, 1/1, 2/1, 4/1, 9/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9	1, 3, 4, 9, 15, 16, 25, 36, 1+4, 1+8, 1+9, 1+15, 1/1, 2/1, 4/1, 9/1, 16/1, 36/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16	1, 3, 4, 9, 15, 16, 25, 36, 48, 1+4, 1+8, 1+9, 1+15, 1/1, 2/1, 4/1, 9/1, 15/1, 16/1, 36/1, 48/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16	1, 3, 4, 9, 15, 16, 25, 36, 48, 64, 1+4, 1+8, 1+9, 1+15, 1/1, 2/1, 4/1, 9/1, 15/1, 16/1, 36/1, 48/1, 64/1, 1+4/1, 1+8/1, 1+9/1, 1+15/1, 4/9, 9/4, 9/9, 16/16
Multi Screen Display Client	up to 4 screens simultaneously;			
E-Map Function	1, 3, 4, 9, 12, 16, 20, 25, 30, 36, 42, 49, 56, 63, 64			
Recording	1+5, 1+7, 1+8, 1+9, 1+11, 1+12, 1+13, 1+15, 1+16, 1+33, 1+47, 1+48			
Resolution	Live Viewing in E-Map (NVR Station)			
Mode	E-PTZ / Scheme / Polling / TV-Wall (optional with decoder) / Virtual channel			
Event Trigger	Recording			
Tag	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF			
Reliability	Manual / Continuous / Schedule / Event (Pre / Post)			
Search & Playback	Supported			
Search Mode	Supported			
Resolution	Automatic Network Replenishment (ANR)			
Playback(Local Monitor)	Date and time (Calendar) / Event			
Playback(Client)	8MP(4K), 6MP, 5MP, 4MP, 3MP, 1080p, UXGA, 960p, 720p, XGA, SVGA, D1, CIF, QCIF			
Synchronize Playback (Local Monitor)	4 x 4K@30fps / 16 x 1080p@30fps			
Synchronize Playback (Client)	up to 16 x 4K@30fps			
Function	Synchronize Playback (Local Monitor)			
Storage	4 x 4K@30fps / 16 x 1080p@30fps			
Max. Internal HDDs	8 x 3.5" HDD			
RAID	Max. 64TB (up to 8TB/each)			
External	RAID 0/1/5/6/10			
Function	IPSAN (iSCSI), up to 10 x IPSAN, Max. 100T (optional)			
Audio	e-SATA			
Compression	Disk group / Quota / Disk dormancy			
Bit rate	G.711a / G.711u / ADPCM / G.722 / G.722.1c / G.726			
Audio Function	32kbps ~ 64kbps			
Alarm	Bi-directional audio / Dumb / Mute / Broadcasting			
Service Alarm Triggers	Alarm input / Video lost / Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge			
System Alarm Triggers	Device disconnected / No disk / Disk error / IP Address conflict / Network disconnected / Low speed / Insufficient recording space / MAC address conflict / Insufficient snapshot space			
Alarm Events	Snapshot / Recording / PTZ preset / Buzzer / Email / Link to Client / Alarm caption / Live view in first window / Link to TV Wall / Link to secondary screen / Full screen viewing			
System	System			
Operating System	Embedded Linux			
User Management	Admin / User			
Log Management	User login / User operation / Alarm / Backup / Update			
Application Programming	NVR Station SDK			
Network	Network			
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, SMTP, VSIP, UPNP, SMTP, IPv4, IPv6 (optional)			
Viewer Software	CMS (NVR Station) / Web / iOS app / Android app			
Max. User Access	64 Users			
Output Bandwidth	256Mbps			
Function	NAT / Socks5 / Multiple network access / Packet loss recovery / Auto network organizing			
Network Test	Supported			
Interfaces	Supported			
Ethernet	N+1			
Video Out	2 x Gigabit network port, RJ45 interface			
Audio In / Out	1 x HDMI (up to 3840 x 2160@60Hz)			
Alarm In / Out	1 x VGA (up to 1920 x 1080@60Hz)			
Control	1 x RCA Line in / 1 x RCA Line out			
USB	2 x Inputs / 2 x Outputs			
e-SATA	2 x RS485			
Operating Temperature	2 x USB2.0, 1 x USB3.0			
Operating Humidity	1 x e-SATA			
Electrical	Environmental			
Power	-10°C ~ 55°C / 14°F ~ 131°F			
Power Consumption	100 ~ 240V AC, 50 ~ 60Hz			
Mechanical	Max. 20W (HDD not included)			
Weight	12.5kg / 27.5lb (HDD not included)			
Dimensions	443 x 561 x 88mm / 16.93" x 22.09" x 3.46"			